Kinderkraft




XRIDER 2 i-Size

USER GUIDE

MODEL: XRIDER 2 i-Size ECE R129.03 v.1.0

ATTENTION! Product graphics serve an illustrative function only!

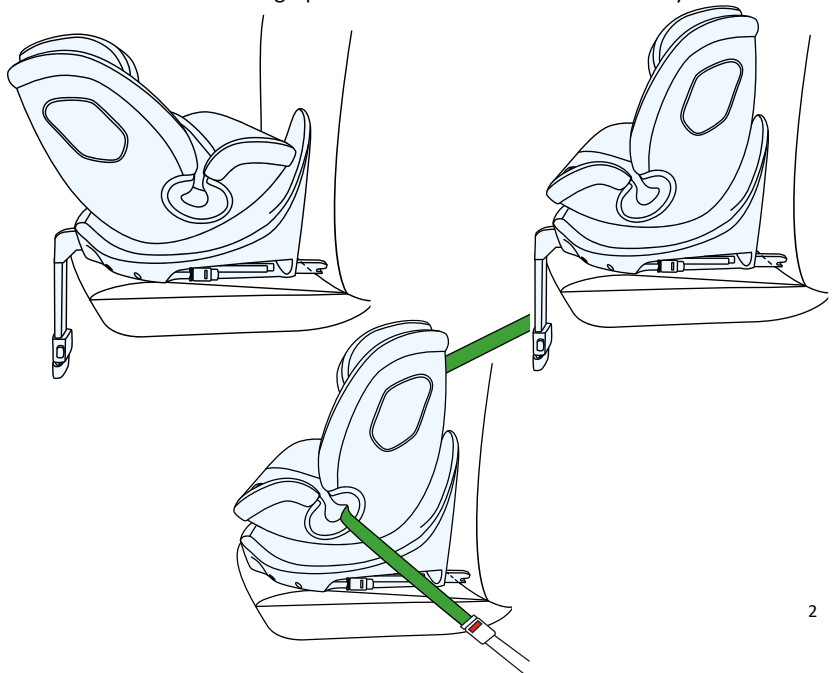


1.0 Usage


The car seat has been designed, tested and approved for use in accordance with the requirements of UN/ECE Regulation No. 129 concerning the approval of child-restraint systems (UN/ECE R129/03).

Do not set the car seat in a forward facing position until your child is 15 months old and 76 cm tall.

The car seat can be installed in the car in places indicated by the manufacturer in the vehicle manual. Manufacturer's instructions shall be read before using the car seat.

To ensure proper installation, please refer to the table on the next page.

Hight of the child	Car seat positioning	Car seat mounting
40cm–105cm		 ISOFIX + support leg + internal safety harness
76cm-105cm		 ISOFIX + support leg + internal safety harness
100cm-150cm		 ISOFIX + three-point car seat belt
		 three-point car seat belt

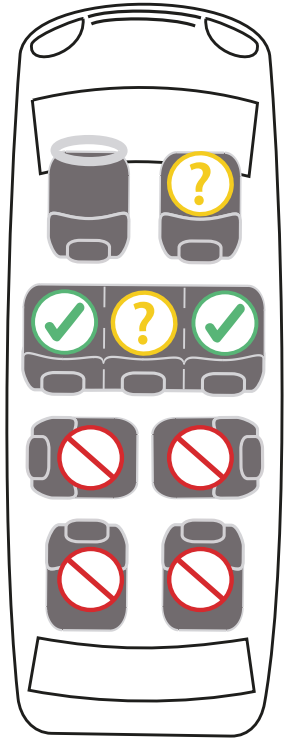

2.0 Safety instructions

Please take a few minutes to read this instruction manual in order to ensure the proper safety of your child.

• The car seat MUST NOT be installed on the vehicle seats mounted backwards or sideways.

• The car seat can only be installed on the vehicle seat with a three-point car seat belt. • The front air-bag must be deactivated.

• It is recommended to install the car seat on the vehicle back seats only.

!WARNING!

Please refer to your vehicle operating manual for information on the suitability of the vehicle seat for use with a car seat.

! Remember - the internal safety harness holding the child should be adjusted to the child's body shape and not twisted. For this reason, the child should not wear thick clothes under the safety harness.

! The car seat waist belts must run as low as possible across your child's pelvis to ensure optimum effect in the event of an accident.

! The car seat should be replaced when it has been subjected to violent stresses during a traffic accident.

! The car seat cannot be modified in any way without the acceptance of the relevant authority granting approvals. Failure to install the car seat in accordance with the manufacturer's instructions may pose a threat to people's life and health.

! Protect the car seat from direct sunlight, otherwise your child may be burnt by its heated parts. Protect your child and the car seat from sunlight.

! NEVER leave your child unattended in the car seat.

! Make sure that the luggage and other objects are adequately secured, in particular on the rear parcel shelf, as they can cause injuries in the event of a collision.

! The car seat CANNOT be used without a cover.

! DO NOT use any replacement covers, other than those recommended by the manufacturer, as the cover is an integral part of the safety system of a car seat.

! DO NOT use any attachment points, other than those described in the instruction manual and marked on a car seat.

! All hard elements and plastic parts of the car seat must be placed and installed in a way preventing them from being trapped by the sliding seat or vehicle doors under normal vehicle operating conditions.

! Regularly check the technical condition of the car seat, pay special attention to the fixing points, seams and adjusting parts. It is important to ensure that all mechanical elements are fully operational. Never grease or oil parts of the car seat.

! DO NOT use the car seat if its parts are damaged or loose.


! In the event of an emergency, it is important to quickly unfasten the car seat belts. This means that the release button of the safety harness is not fully secured; make sure your child does not play with the safety harness.

! Set a good example for your child and always fasten your car seat belt. An adult who is not fastened with a car seat belt can also pose a threat to a child.

! Make sure that the car seat is correctly secured before each journey in the car.

! The car seat must be secured at all times, even when not in use. The car seat that is not secured can injure the passengers even during emergency braking.

! On some vehicle seats made of delicate materials, the use of car seats may leave marks and/or discolouration. In order to prevent it, you can place a blanket, towel or similar product under the car seat.

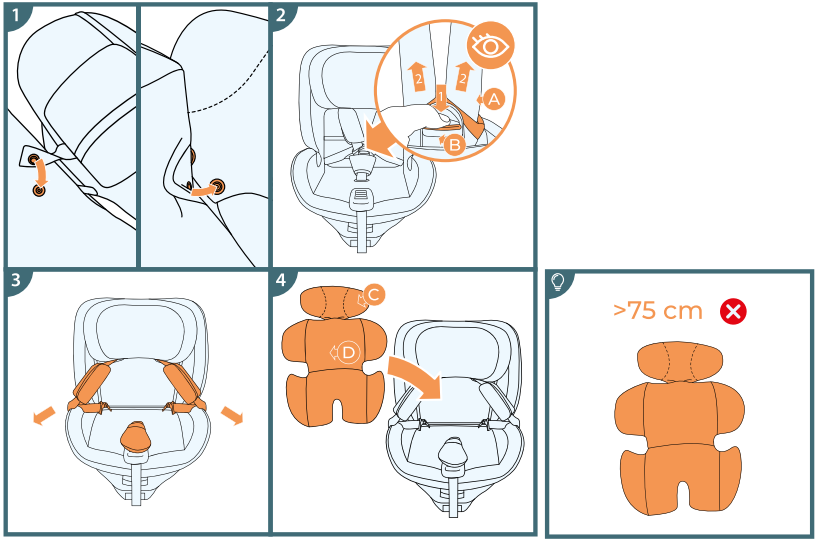


A: Internal safety harness
B: Safety harness buckle
C: Headrest part of the insert
D: Insert

3.0 Securing the child

3.1 Installation of insert

Baby insert improves protection level and comfort. The insert should be used until the child reaches 75cm.


1. Connect the headrest part of the insert with the rest of it using snap fasteners.
2. Unfasten the safety harness.
3. Pull the safety harness to the sides of the car seat.
4. Put the insert in place

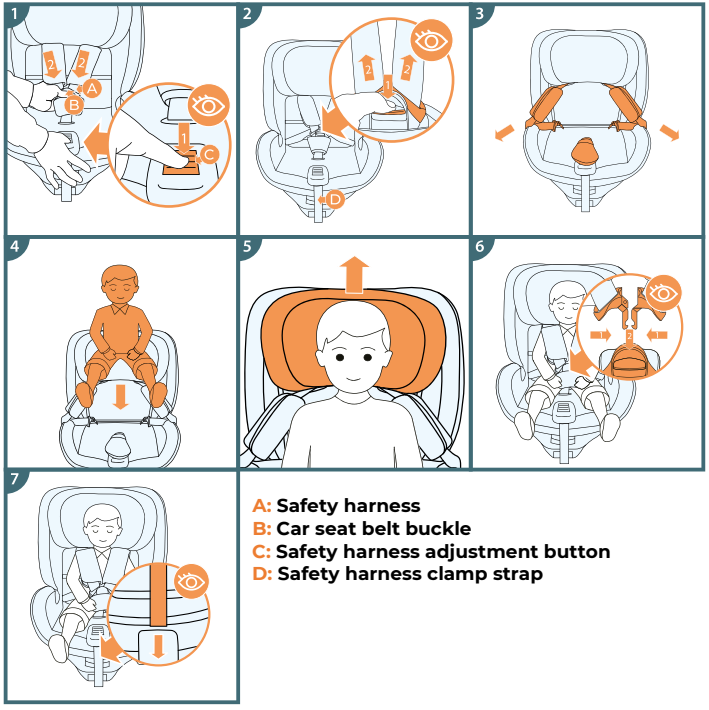



A: Safety harness
B: Car seat belt buckle
C: Safety harness adjustment button
D: Safety harness clamp strap


3.2 Securing the child with the internal safety harness

1. Press the safety harness adjustment button while pulling the harness straps. **Remember! Do not pull on the shoulder pads.**
2. Unfasten the safety harness
3. Move the safety harness to the sides of the car seat
4. Place your child in the car seat
5. Adjust the headrest to the child's height
6. Fasten the safety harness
7. Adjust the safety harness to your child by pulling the safety harness clamp strap

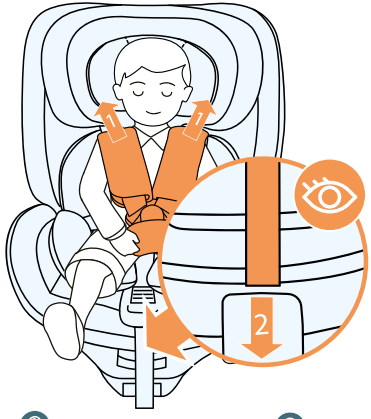








3.3 Tightening the safety harness


1. Remove any slack from the waist part of the safety harness by pulling it up using the shoulder part.
2. Pull the adjustment strap until the harness lies flat on your child's body.

IMPORTANT! Make sure that the safety harness is not twisted.

Make sure that the safety harness is tightened so that there is no more than 1 cm of slack between the harness and the child.

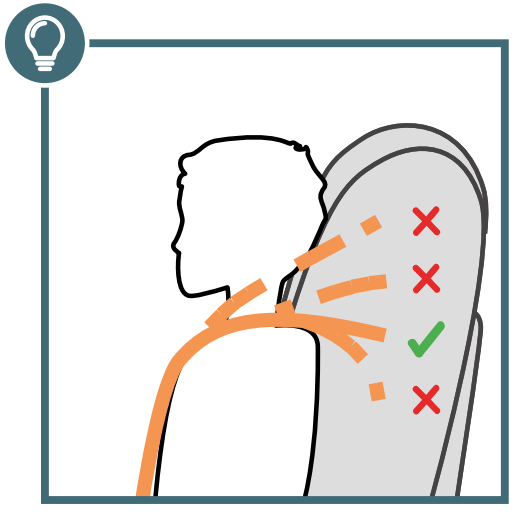

Adjust the appropriate height of the shoulder part of the safety harness so that the harness enters the car seat backrest flat, horizontally, right above the child's shoulders.

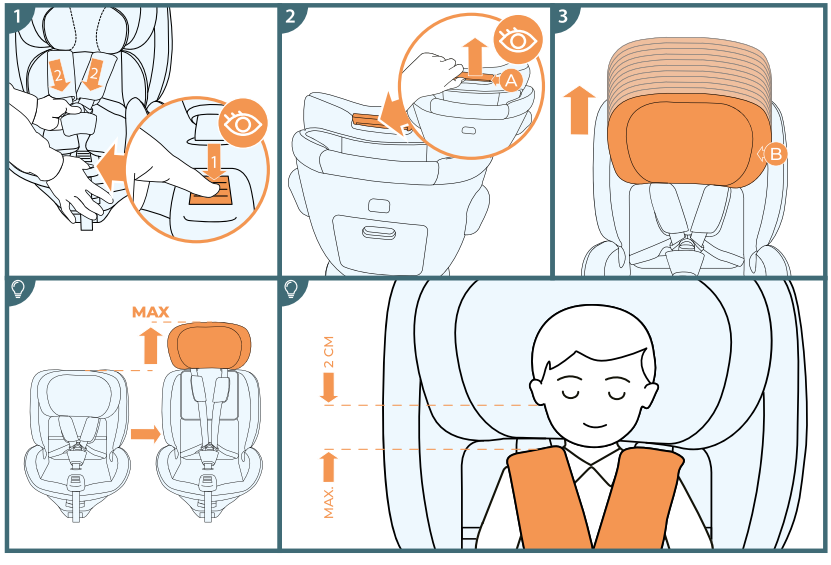


A: Headrest height adjustment lever
B: Headrest

3.4 Height of the headrest

1. Loosen the safety harness straps fully by pressing the button and pulling the safety harness straps **Remember! Do not pull on the shoulder pads.**
2. Grasp the headrest adjustment lever located on the back of the headrest and pull it gently upwards
3. Adjust the headrest by selecting one of eleven options and when the height is adjusted, release the adjustment lever.

IMPORTANT! Make sure the vehicle seat headrest is locked in place.

The headrest should fit snugly around your child's head, with the lower part of the headrest at the same height as your child's shoulders.

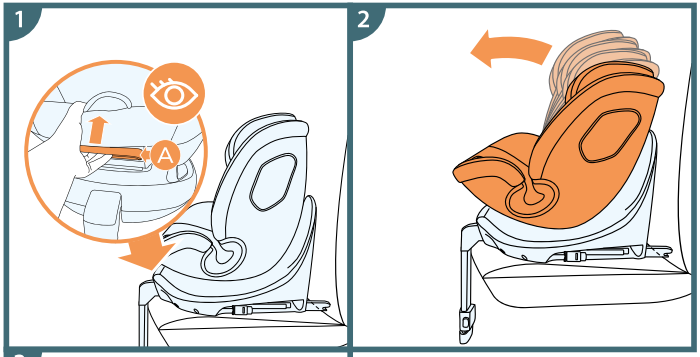


A: Seat inclination adjustment lever

3.5 Seat inclination adjustment mechanism

1. Pull the seat inclination adjustment lever
2. Adjust the seat inclination angle and release the lever in the required position (one of four possible options)
3. Move the seat slightly until you hear a distinct "click" sound.

Important! There are four seat inclination options, both in forward facing and rearward facing positions.

Important! When using the car seat for the 100-150 cm range, the car seat must be placed in a vertical position.

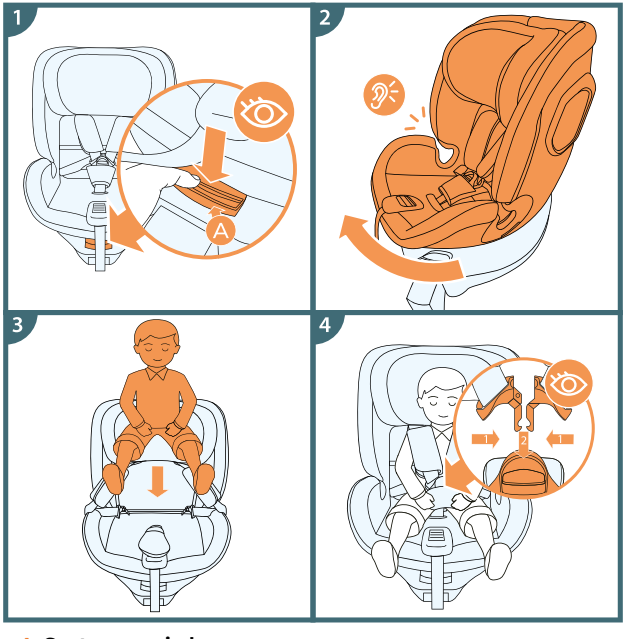


A: Seat easy spin lever

3.6 Easy spin mechanism

The easy spin mechanism function helps to conveniently position the child or take the child out of the car seat.

1. Pull the rotation lever located on the base of the car seat.
2. Rotate the car seat to the desired direction, then release the lever. You will hear a "click" indicating that the car seat is locked in the selected position.
3. Place the child in the car seat
4. Secure the child with the car seat belts

Note the audible sound of the easy spin mechanism lock

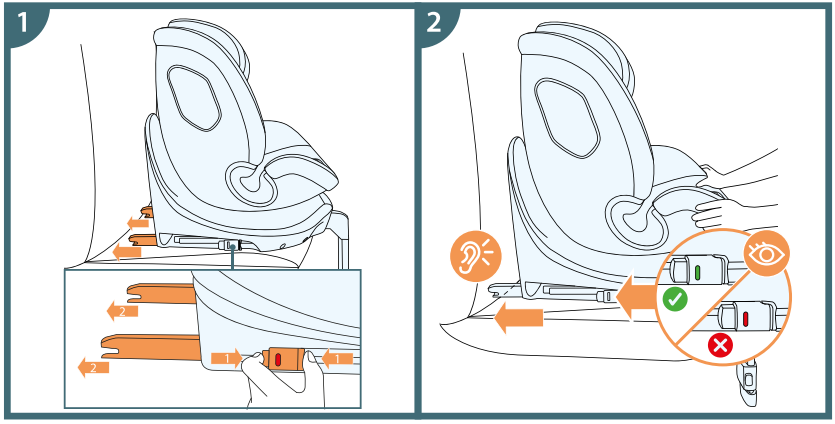

4.0 Installation in the vehicle


4.1 ISOFIX installation

Before placing the car seat in the vehicle, unfold the support leg.

1. The car seat together with the unfolded support leg should be placed on the vehicle seat. Press both sides of the ISOFIX release button and extend the ISOFIX connector arms to their maximum length.
2. Grasp the car seat with both hands and insert both latches into the places of installation on the vehicle seat. When you hear a "click" of each of the ISOFIX latches, push the seat of the car seat against the backrest of the vehicle seat, exerting firm even pressure on both sides.

ATTENTION! The locking latches are properly attached only when both button indicators are completely green.

Pay attention to the audible clicking sound of the ISOFIX connectors and grasp the car seat to check whether it is securely installed without any play. If it moves and the ISOFIX latches come out, repeat the previous steps.

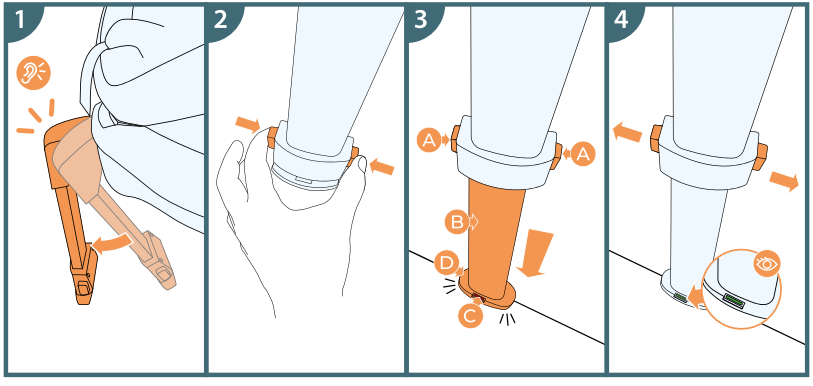


A: Support leg height adjustment buttons (on both sides)
B: Support leg extension
C: Support leg base indicator
D: Support leg base

4.2 Installing the support leg

1. Pull the car seat support leg out of the base and unfold it fully.
2. Press the leg height adjustment buttons on both sides of the leg (this will release the extension lock of the leg, which will automatically extend)
3. Adjust the leg height – its foot should be pressed firmly against the floor
4. Release the buttons

The car seat is installed correctly, if, after taking these steps the car seat is right in place and the correct installation indicator is green.

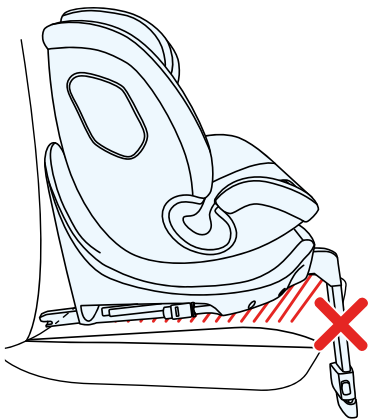




ATTENTION! Never install the support leg on the storage box in the floor of the car - the storage box can break during an accident; if in doubt, refer to the vehicle manual.

ATTENTION! The support leg must never be unsupported, and no objects can be placed under it.


IMPORTANT! Make sure that the support leg serves as a support and does not raise the bottom of the car seat above the plane of the vehicle seat.

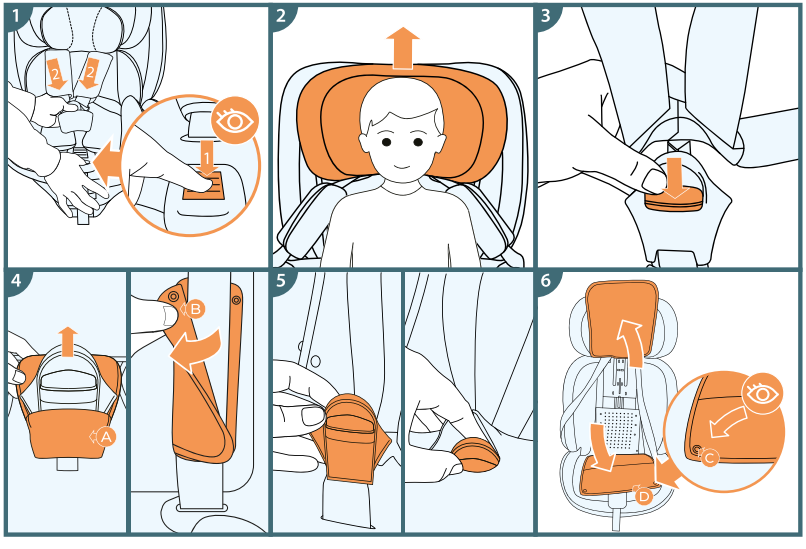

A: **Buckle pad**
B: **Shoulder pads**
C: **Fastener**
D: **Back part of the cover**


5.0 Stowing away the five-point safety harness

1. Loosen the car seat belt as much as possible by pressing the button and pulling on the car seat belt. **Remember! Do not pull on the shoulder pads.**
2. Set the headrest at the highest position
3. Unfasten the buckle
4. Remove the pad from the buckle and remove the shoulder pads by unfastening the fasteners.
5. Guide the buckle through the opening in the cover
6. Unfasten the fasteners and uncover the car seat backrest

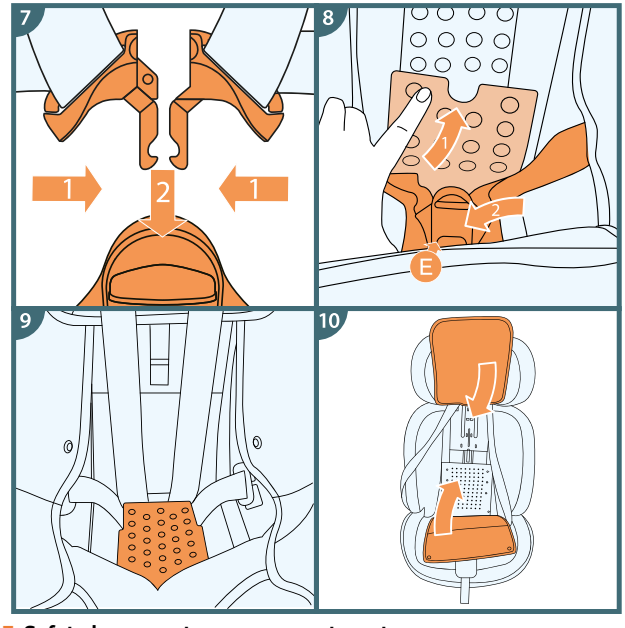

E: Safety harness storage compartment

7. Fasten the five-point internal safety harness
8. Open the compartment cover and then put the fastened safety harness into the compartment.
9. Arrange the safety harness flat along the backrest and close the compartment cover.
10. Cover the car seat backrest by fastening the fasteners on the edges of the fabric.

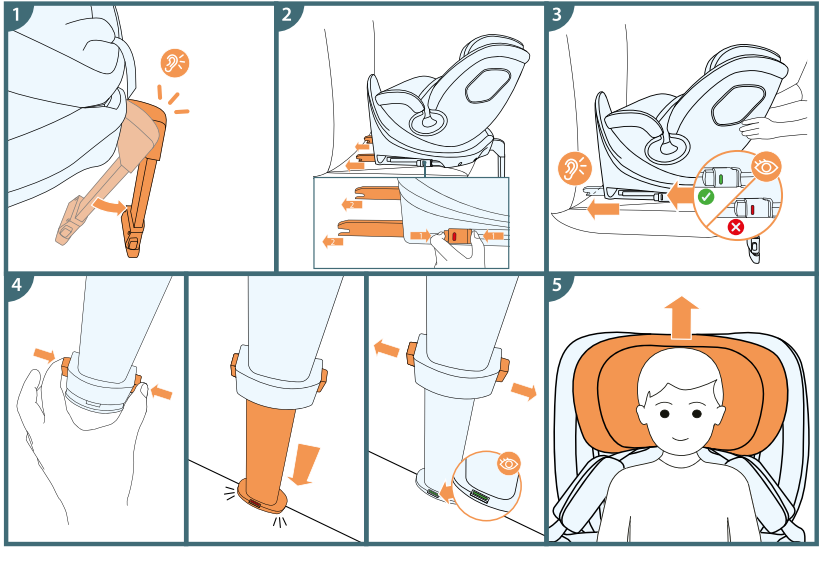


6.0 Installation of the car seat

Note! The car seat should be placed directly on the vehicle seat.


6.1 Children with a height ranging from 40 to 105 cm using the ISOFIX installing system with a support leg.

1. Unfold the support leg
2. Install the car seat on the seat rearward facing using the ISOFIX connectors (if the car seat is already installed forward facing, rotate it using an easy spin mechanism to a rearward facing position)
3. Push the car seat all the way into the seat and check its correct installation – the colour of the indicators should change to green.
4. Press the support leg height adjustment button and hold it until the leg extends (adjust the leg height until the foot is pressed firmly against the floor).
5. Adjust the headrest to the child's height.

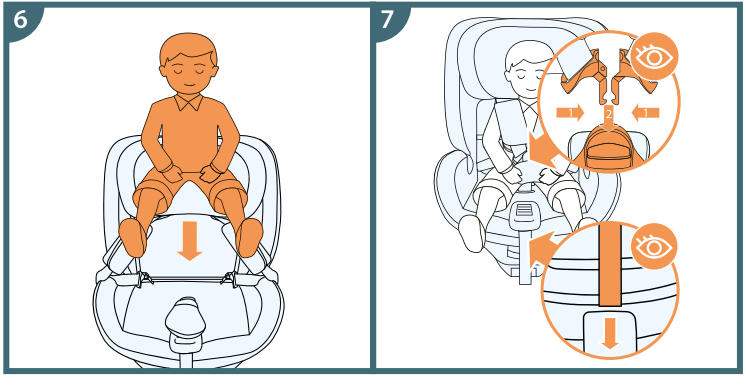

6. Place your child in the car seat
7. Secure the child with the internal safety harness


IMPORTANT! If the child has already reached 76 cm, remove the insert before placing the child in the car seat.

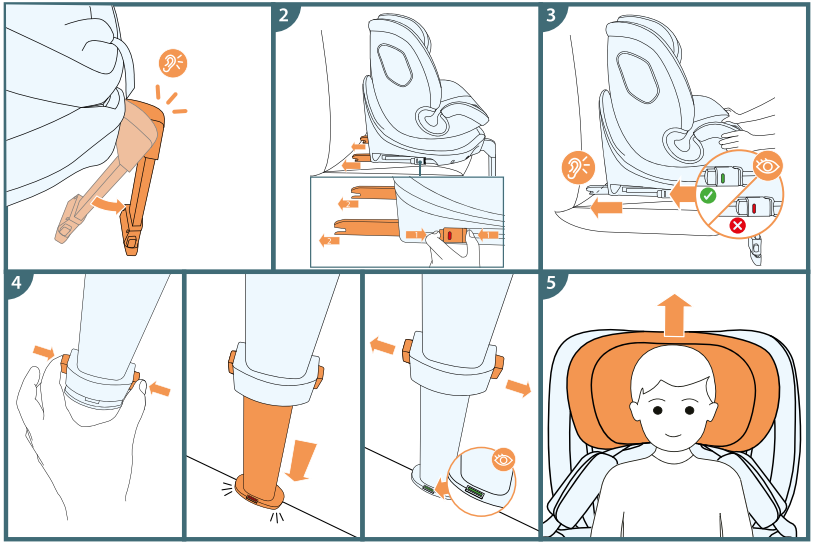


6.2 Children with a height ranging from 76 to 105 cm using the ISOFIX installing system with a support leg.

1. Unfold the support leg
2. Install the car seat on the vehicle seat forward facing using ISOFIX connectors. (if the car seat is already installed rearward facing, rotate it using an easy spin mechanism to a forward facing position)
3. Push the car seat all the way into the seat and check its correct installation – the colour of the indicators should change to green.
4. Press the support leg height adjustment button and hold it until the leg extends (adjust the leg height until the foot is pressed firmly against the floor).
5. Adjust the headrest to the child's height.

6. Place your child in the car seat
7. Secure the child with the internal safety harness

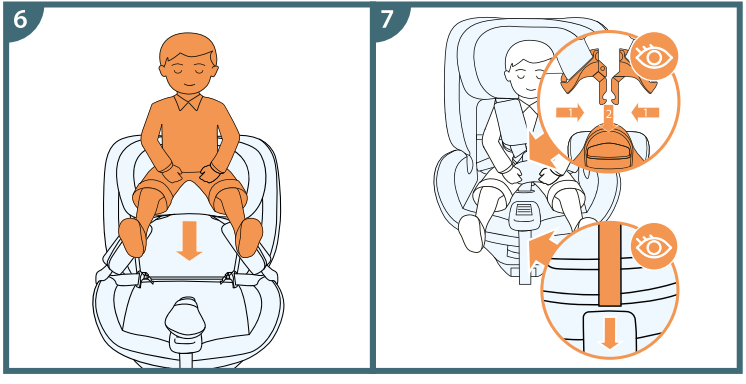


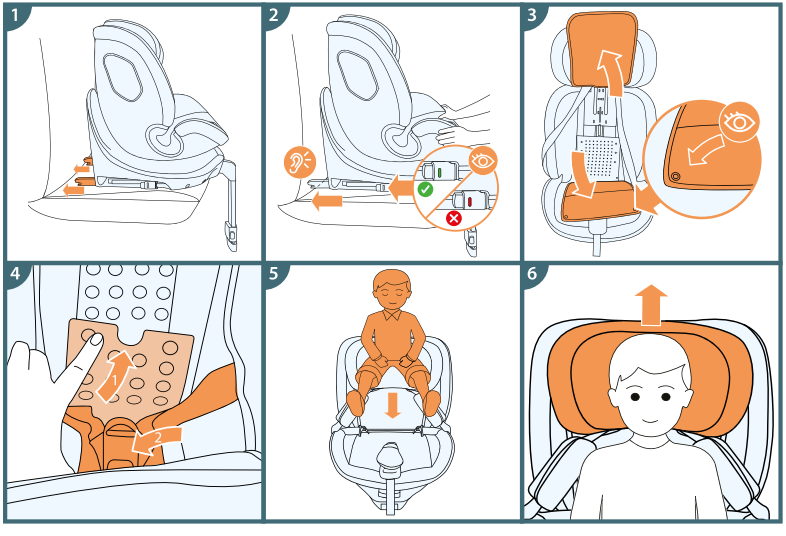

6.3 Children between 100 and 150 cm - using the ISOFIX connectors and a three-point car seat belt.


Important! When using the car seat for the 100-150 cm range, the car seat must be placed in a vertical position.

1. Install the car seat on the vehicle seat forward facing using ISOFIX connectors
2. Push the car seat all the way into the seat and check its correct installation – the colour of the indicators should change to green.
3. Uncover the car seat shell by pulling apart the hook and loop fastener straps located on its edges and open the safety harness compartment located in the shell.
4. Store the five-point safety harness in the compartment. The entire procedure is described in detail in the section on stowing away the safety harness.
5. Place the child in the car seat
6. Adjust the headrest to the child's height.

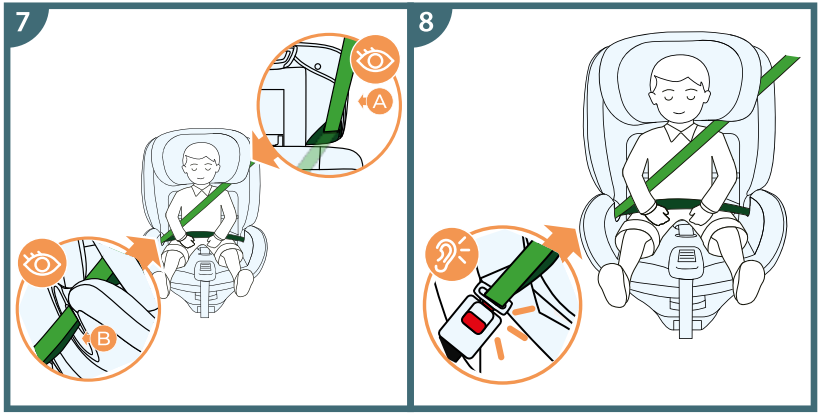

A: Shoulder belt guide
B: Waist belt guide


7. Guide the shoulder belt through the green guide of the shoulder belt.
8. Guide the car seat belt through both waist belt guides. Fasten the car seat belt. You will hear a characteristic "click".

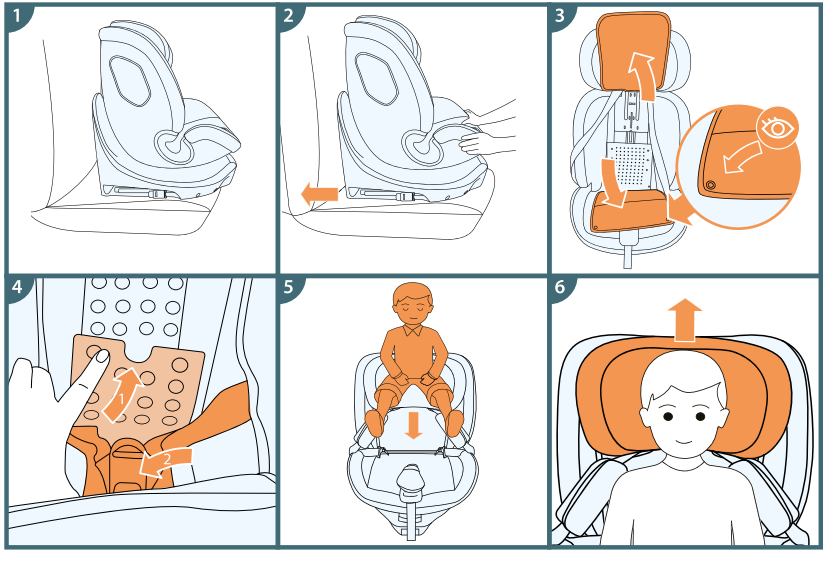

6.4 Children between 100 and 150 cm tall - using a three-point car seat belt.


Important! When using the car seat for the 100-150 cm range, the car seat must be placed in a vertical position.

1. Install the car seat forward facing on the vehicle seat.
2. Push the car seat all the way to the vehicle seat.
3. Uncover the car seat shell by unfastening the fasteners located on its edges and open the safety harness compartment located in the shell.
4. Store the five-point safety harness in the compartment. The entire procedure is described in detail in the section on stowing away the safety harness.
5. Place the child in the car seat
6. Adjust the headrest to the child's height.

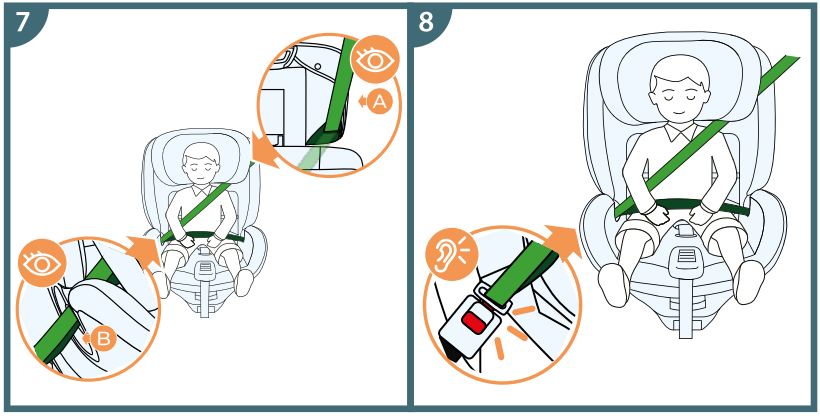


A: Shoulder belt guide
B: Waist belt guide

7. Guide the shoulder belt through the green guide of the shoulder belt.
8. Guide the car seat belt through both waist belt guides. Fasten the car seat belt. You will hear a characteristic "click".

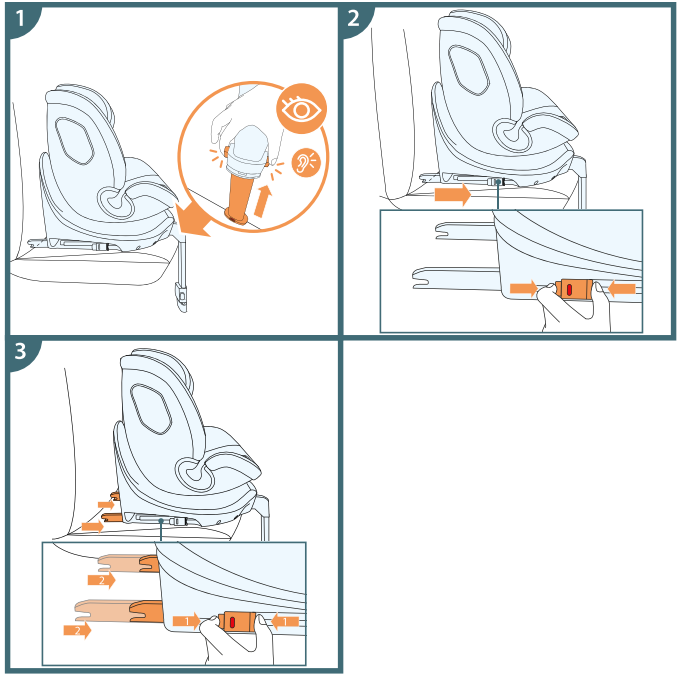

7.0 Removing the car seat (ISOFIX installing system+support leg)


1. Fold the support leg extension by pressing both buttons on the sides of the leg extension and slide it up, tucking it into the rest of the leg. You will hear a "click" which means the leg has been tucked inside.
2. Press the release button on both ISOFIX latches. (The latches will be released, and the colour of the ISOFIX indicators will change from green to red)
3. Insert the ISOFIX arms into the base of the car seat using the sliding lever

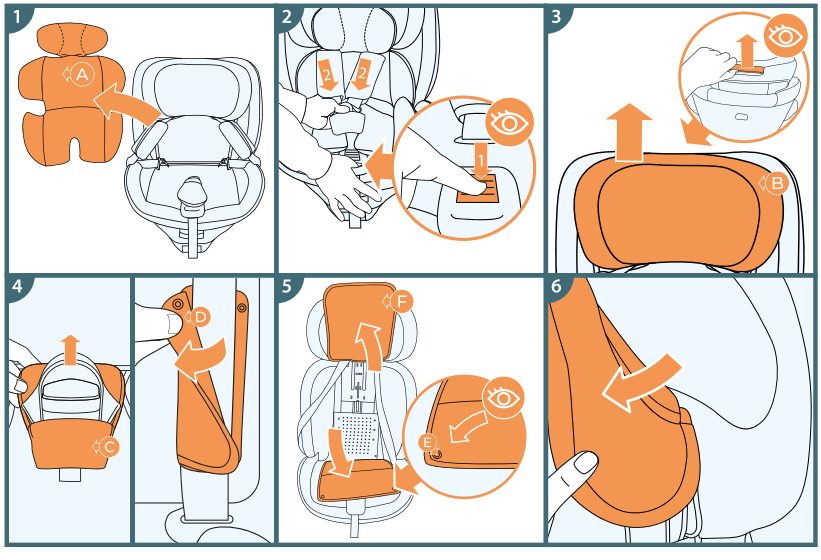

A: **Insert**
B: **Headrest**
C: **Buckle pad**
D: **Shoulder pad**
E: **Front part of the seat backrest cover**
F: **Fastener**

7.1 Removing the cover

1. Remove the insert
2. Loosen the car seat belt completely by pressing the button and pulling on the car seat belt. **Remember! Do not pull on the shoulder pads.**
3. Move the headrest to the highest position
4. Remove the pad from the buckle and the shoulder pads from the belts by unfastening the fasteners.
5. Uncover the car seat shell by unfastening the fasteners located on its edges.
6. Remove the fabric from the headrest starting from the sides.

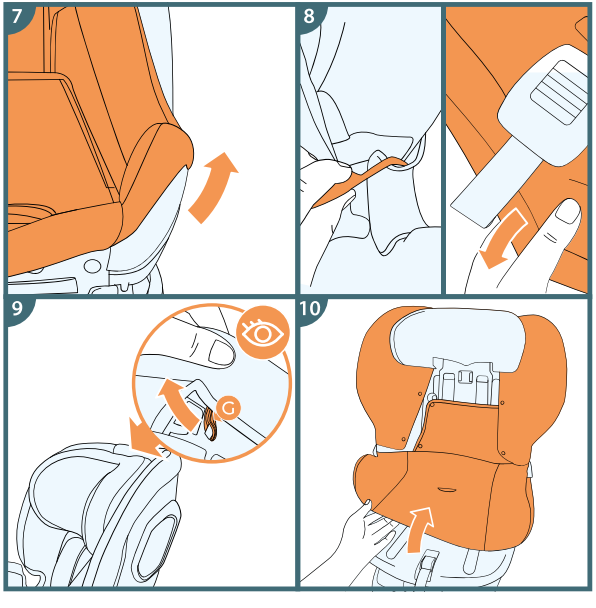

G: Rubber securing the fabric

7. Starting at the bottom of the car seat, carefully remove the cover
8. While stretching the material, slide it off the waist part guides and the safety harness adjustment button.
9. Pull the rubber bands on the back of the car seat backrest to remove them from the hooks. **Note! Make sure that both rubber bands are removed from the hooks.**
10. Slide the fabric off, passing it through the upper part of the car seat

7.2 Installing the cover

To put the cover back on - just reverse the above sequence of actions. Align the cover with the attachment points on the car seat. Start by installing the cover on the shell of the car seat and finally on the headrest part.

Important! Remember to hook both fastening rubber bands onto the hooks located on the back of the cover.

8.0 Cleaning

CAUTION The car seat must not be used without the cover.

• The cover is removable and hand washable at 30°C.
• Follow the washing instructions on the cover information label.
The cover should not be centrifuged or dried in a tumble dryer (which may lead to separation of the material layers).
• Prolonged sun exposure of the cover is prohibited.
• Plastic parts can be cleaned with soap and water.
• Do not use aggressive cleaning agents (such as solvents).
• The safety harness can be cleaned in lukewarm soapy water.

Warning! You must never remove the metal clips from the safety harness.

The full text of the Warranty Terms and Conditions is available on the website WWW.KINDERKRAFT.COM

Kinderkraft

(AR) إضمان مصلحة عملائنا . نحن في خدمتكم! إذا كانت لديكم أي مشكلة مع المنتج الذي حصلتم عليه، فيجرى الاتصال بنا بالطريقة التي تفضلونها!

(CS) V zájmu péče o naše klienty - jsme rádi k dispozici! Pokud jste se setkali s nějakým problémem v souvislosti s obdrženým výrobkem, kontaktujte nás způsobem, který vám nejvíce vyhovuje!

(DE) In Sorge für unsere Kunden - stehen wir gerne zu Ihrer Verfügung! Wenn Sie auf ein Problem mit dem erhaltenen Produkt treffen, treten Sie bitte mit uns in Kontakt in der bequemsten Weise für Sie!

(EN) In the interests of our Clients - we are at your disposal! If you have a problem with the product you received, contact us in the most convenient way for you!

(ES) ¡Por el bien de nuestros clientes, estamos a su disposición! ¡Si tiene cualquier problema con el producto recibido, póngase en contacto con nosotros de forma más cómoda para usted!

(FR) Dans l'intérêt de nos clients - nous sommes à votre disposition! Si vous avez un problème avec le produit que vous avez reçu, Contactez-nous de la manière la plus pratique pour vous!

(HU) Bármikor állunk az ügyfeleink rendelkezésére! Ha az átvett termékkel kapcsolatban valamilyen problémába ütkozott, az Onnek legmegfelelobb módon vegye fel velünk a kapcsolatot!

(IT) Prendersi cura dei nostri Clienti - siamo alla Vostra disposizione! Se hai incontrato un problema con il prodotto che hai ricevuto. Contattaci nel modo piu conveniente per te!

(NL) In het belang van onze klanten - staan wij ter beschikking! Als u een probleem met het ontvangen product tegenkomt, neemt contact met ons op via de manier die u het makkelijkste vindt!

(PL) W trosce o naszych Klientów - jesteśmy do dyspozycji! Jeśli napotkałeś problem dotyczacy otrzymanego produktu, skontaktuj sie z nami w najbardziej dogodny dla Ciebie sposób!

(PT) Para o conforto dos nossos Clientes - estamos sempre à sua disposição! Se tiver qualquer problema com o nosso produto, entre em contacto connosco de modo mais confortável para si!

(RO) In interesul clienţilor noştri - suntem la dispozitia dumneavoastră! Dacă aveţi o problema cu produsul pe care l-aţi primit, contactaţi-ne in modul cel mai convenabil pentru dvs.!

(RU) заботясь о наших клиентах, мы находимся в вашем распоряжении. Если вы столкнулись с проблемой, связанной с полученные продукто, свяжитесь с нами наиболее удобным для вас способ!

(SK) Náš zákazník je pre nás dôležitý - sme vám k dispozícii! Ak máte akýkolvek problém súvisiaci s doručeným produktom, kontaktujte nás spôsobom, ktorý vám najviac vyhovuje!

(SV) I våra kunders intresse - vi står till ditt förfogande! Om du har problem med den produkt du fick, kontakta oss på det mest praktiska sättet för dig!

International contact:
support@kinderkraft.com
+44 20 4525 0748

kinderkraftofficial
kinderkraft
kinderkraftofficial

منتج/VÝROBCE/HERSTELLER/MANUFACTURER/FABRICANTE/FABRICANT/GYARTÓ/FABBRICANTE/FABRIKANT/PRODUCENT/FABRICANTE/PRODUCĂTOR/ПРОИЗВОДИТЕЛЬ/VÝROBCA/TILLVERKARE:

4Kraft Sp. z o.o. ul. Tatrzańska 1/5
60-413 Poznań, Poland